


# DEWALT®


## ANCHORS & FASTENERS

# DUST X+™

ANCHOR INSTALLATION SYSTEM

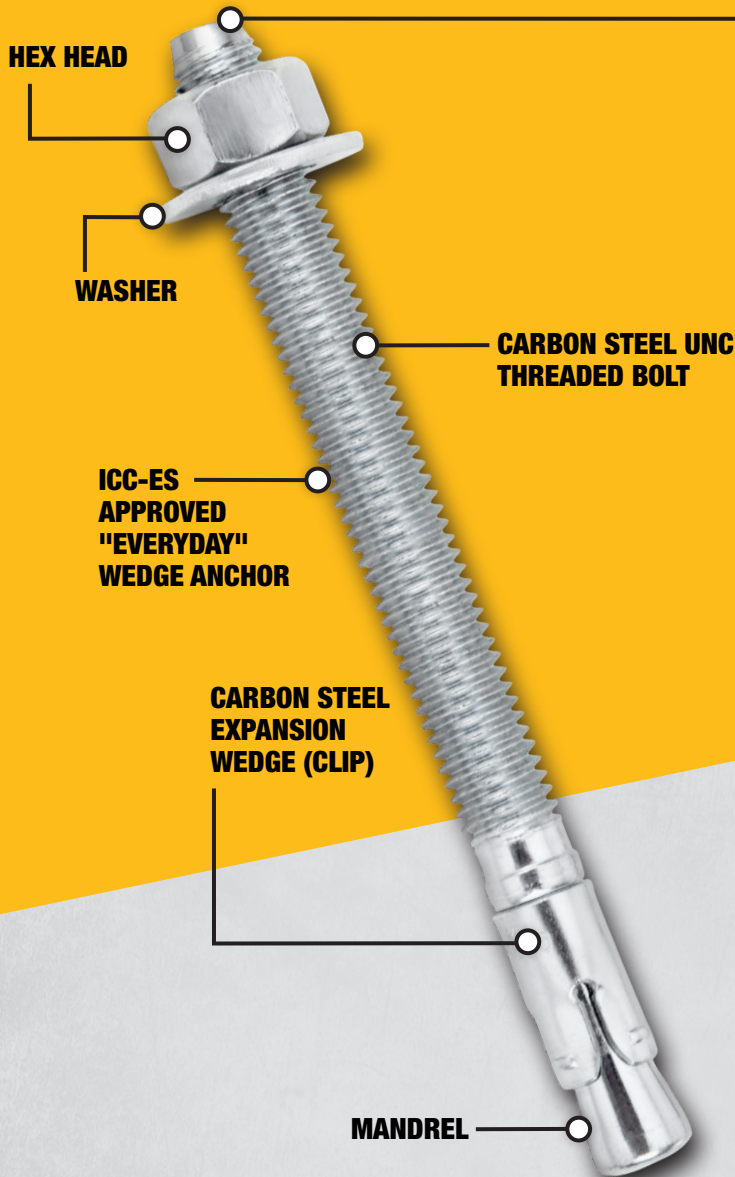

### TOP VIEW

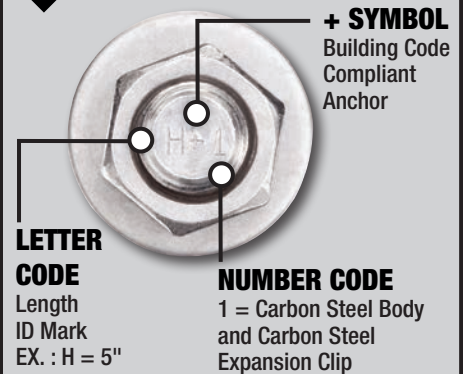

### TYPICAL APPLICATIONS

- Structural connections, like beam and column anchorage
- Safety-related attachments
- Protective barriers and racking
- Tension zone applications, like cable trays and strut, pipe supports, fire sprinkler
- Seismic and wind loading
- Interior applications / low level corrosion environment

### APPROVALS



ESR-2818  
Concrete  
ESR-2966  
Masonry



2015  
2012  
2009



Recognition in cracked  
and uncracked concrete including  
seismic and wind loading  
(Category 1 Anchors)



Full FM & UL  
listings: [www.DEWALT.com](http://www.DEWALT.com)



### BASE MATERIALS



Normal  
Weight  
Concrete



Lightweight  
Concrete



Concrete  
Over Steel  
Deck



Grouted  
Masonry

## WEDGE EXPANSION ANCHOR

## Power-Stud®+ SD1

**POWER-STUD®+ SD1**

CAT #	ANCHOR SIZE	THREAD LEN	CTN	MSTR
7400SD1*	1/4" x 1-3/4"	3/4"	100	600
7402SD1	1/4" x 2-1/4"	1-1/4"	100	600
7404SD1	1/4" x 3-1/4"	2-1/4"	100	600
7410SD1*	3/8" x 2-1/4"	7/8"	50	300
7412SD1*	3/8" x 2-3/4"	1-3/8"	50	300
7413SD1	3/8" x 3"	1-5/8"	50	300
7414SD1	3/8" x 3-1/2"	2-1/8"	50	300
7415SD1	3/8" x 3-3/4"	2-3/8"	50	300
7416SD1	3/8" x 5"	3-5/8"	50	300
7417SD1	3/8" x 7"	5-5/8"	50	200
7420SD1*	1/2" x 2-3/4"	1"	50	200
7422SD1	1/2" x 3-3/4"	2"	50	200
7423SD1	1/2" x 4-1/2"	2-3/4"	50	200
7424SD1	1/2" x 5-1/2"	3-3/4"	50	150
7426SD1	1/2" x 7"	5-1/4"	25	100
7427SD1	1/2" x 8-1/2"	6-3/4"	25	100
7428SD1	1/2" x 10"	8-1/4"	25	100
7430SD1*	5/8" x 3-1/2"	1-1/2"	25	100
7432SD1	5/8" x 4-1/2"	2-1/2"	25	100
7433SD1	5/8" x 5"	3"	25	100
7434SD1	5/8" x 6"	4"	25	75
7436SD1	5/8" x 7"	5"	25	75
7438SD1	5/8" x 8-1/2"	6-1/2"	25	50
7439SD1	5/8" x 10"	8"	25	50
7440SD1*	3/4" x 4-1/4"	1-3/4"	20	60
7441SD1*	3/4" x 4-3/4"	2-1/4"	20	60
7442SD1	3/4" x 5-1/2"	3"	20	60
7444SD1	3/4" x 6-1/4"	3-3/4"	20	60
7446SD1	3/4" x 7"	4-1/2"	20	60
7448SD1	3/4" x 8-1/2"	6"	10	40
7449SD1	3/4" x 10"	7-1/2"	10	40
7451SD1	3/4" x 12"	9-1/2"	10	20
7450SD1*	7/8" x 6"	2-3/4"	10	40
7452SD1	7/8" x 8"	4-3/4"	10	40
7454SD1	7/8" x 10"	6-3/4"	10	20
7461SD1*	1" x 6"	2-3/8"	10	20
7463SD1	1" x 9"	5-3/8"	10	20
7465SD1	1" x 12"	8-3/8"	5	10
7473SD1	1-1/4" x 9"	4-3/4"	5	10
7475SD1	1-1/4" x 12"	7-3/4"	5	10
7473SD1	1-1/4" x 9"	4-3/4"	5	15
7475SD1	1-1/4" x 12"	7-3/4"	5	15

\* Less than the minimum standard anchor length for Strength Design. Published length is the overall length of the anchor. Allow for fixture thickness plus one anchor diameter for the nut and washer thickness when selecting a length. Packaged with nuts and washers.




➤ Dust X+™ anchor installation system



### UPGRADE FROM TRADITIONAL HOLE CLEANING



### STRUCTURAL DESIGN SOFTWARE FOR ANCHORING TO CONCRETE



Download  
DDA™ and  
experience our  
free concrete  
anchoring  
design software.

[DEWALT.COM/DDA](http://DEWALT.COM/DDA)

## RELATED PRODUCTS



**DCH293R2DH**  
20V MAX\* XR® SDS PLUS  
ROTARY HAMMER W/DUST  
COLLECTION



**DCH273P2DHO**  
20V MAX\* XR® SDS PLUS ROTARY  
HAMMER W/ON-BOARD DUST  
EXTRACTOR



**DWH050K**  
LARGE HAMMER DUST  
EXTRACTION - HOLE CLEANING



**DWV012**  
10-GALLON HEPA/RRP  
WET/DRY DUST EXTRACTOR



**HOLLOW DRILL BIT**  
SDS PLUS AND  
SDS MAX CARBIDE

\*For 20V MAX\* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

# 1-800-4-DEWALT

# www.DEWALT.com

Copyright ©2021 DeWALT. The following are trademarks for one or more DeWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWS1SS