



## ANCHORS & FASTENERS



### INTEGRATED WASHER

with serrations under the head secures the attachment

### ENGINEERED STEEL

designed to cut through hard concrete and maintain ductility (bends before breaking)

### IDENTIFYING MARK

diameter, length and product marks embossed on head for easy identification

**STANDARD BIT**  
designed for ANSI carbide drill bits

**DUST RELIEF THREAD PROFILE**  
improves speed & reduces effort for fast installation


### LARGEST RANGE

for top of masonry wall

**THE ONLY APPROVED**  
mechanically galvanized screw anchor for pressure treated lumber



## Screw-Bolt+™ Concrete and Masonry Screw Anchor

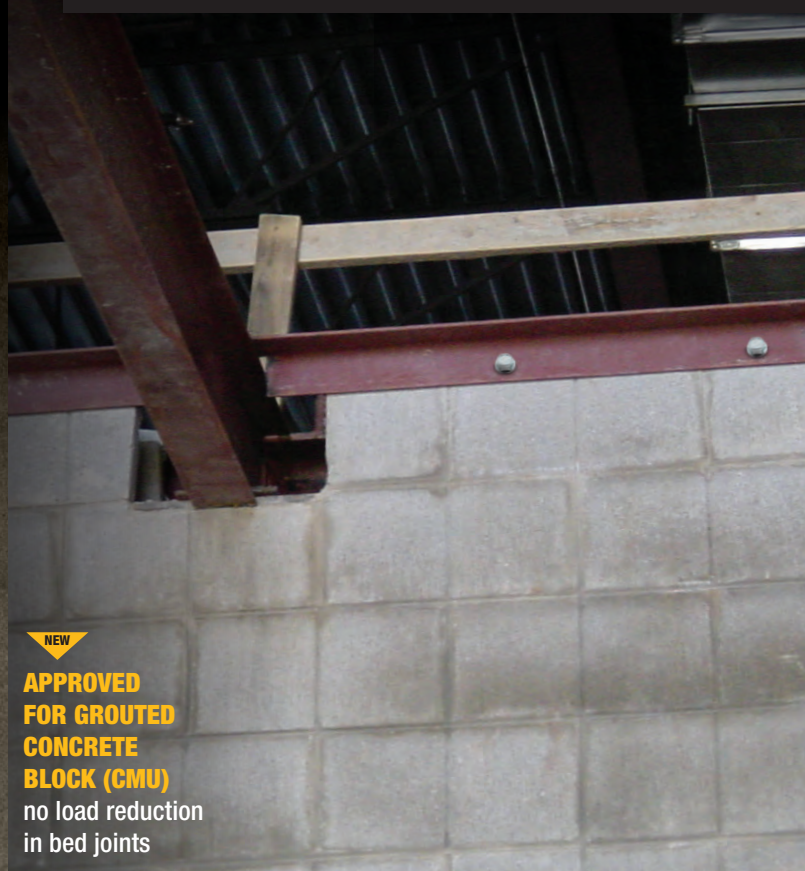


**APPROVED FOR GROUTED CONCRETE BLOCK (CMU)**  
no load reduction in bed joints



**AVAILABLE IN MECHANICALLY GALVANIZED ZINC**  
approved for pressure treated lumber

### COMPREHENSIVE SELECTION

A wide range of diameters and lengths (zinc & galvanized)

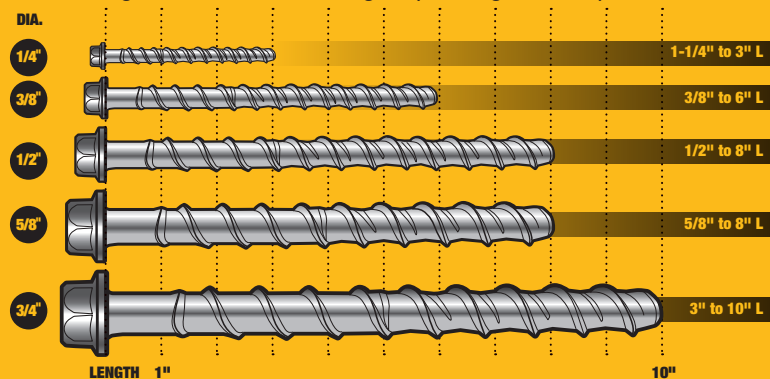



# Screw-Bolt+™

## Concrete and Masonry Screw Anchor

### ANCHORS & FASTENERS

SCREW-BOLT+ ANCHORS							
ZINC PLATED	GALVANIZED	ANCHOR	LENGTH	HOLE SIZE	SOCKET SIZE	CTN	MSTR
*PFM1411000	-	1/4" x 1-1/4"	1-1/4"	1/4"	7/16"	100	600
PFM1411020	-	1/4" x 1-3/4"	1-3/4"	1/4"	7/16"	100	600
PFM1411060	-	1/4" x 2-1/4"	2-1/4"	1/4"	7/16"	100	600
PFM1411080	-	1/4" x 2-5/8"	2-5/8"	1/4"	7/16"	100	500
PFM1411100	-	1/4" x 3"	3"	1/4"	7/16"	100	500
*PFM1411160	-	3/8" x 1-3/4"	1-3/4"	3/8"	9/16"	50	300
PFM1411220	-	3/8" x 2-1/2"	2-1/2"	3/8"	9/16"	50	300
PFM1411240	PFM1461240	3/8" x 3"	3"	3/8"	9/16"	50	250
PFM1411280	PFM1461280	3/8" x 4"	4"	3/8"	9/16"	50	250
PFM1411300	PFM1461300	3/8" x 5"	5"	3/8"	9/16"	50	250
PFM1411320	PFM1461320	3/8" x 6"	6"	3/8"	9/16"	50	150
*PFM1411340	-	1/2" x 2"	2"	1/2"	3/4"	50	200
PFM1411360	-	1/2" x 2-1/2"	2-1/2"	1/2"	3/4"	50	200
PFM1411380	-	1/2" x 3"	3"	1/2"	3/4"	50	150
PFM1411420	PFM1461420	1/2" x 4"	4"	1/2"	3/4"	50	150
PFM1411460	PFM1461460	1/2" x 5"	5"	1/2"	3/4"	25	100
PFM1411480	PFM1461480	1/2" x 6"	6"	1/2"	3/4"	25	75
PFM1411520	PFM1461520	1/2" x 8"	8"	1/2"	3/4"	25	100
*PFM1411540	-	5/8" x 3"	3"	5/8"	15/16"	25	100
PFM1411580	-	5/8" x 4"	4"	5/8"	15/16"	25	100
PFM1411600	PFM1461600	5/8" x 5"	5"	5/8"	15/16"	25	75
PFM1411640	PFM1461640	5/8" x 6"	6"	5/8"	15/16"	25	75
PFM1411680	PFM1461680	5/8" x 8"	8"	5/8"	15/16"	25	50
*PFM1411700	-	3/4" x 3"	3"	3/4"	1-1/8"	20	60
*PFM1411720	-	3/4" x 4"	4"	3/4"	1-1/8"	20	60
PFM1411760	-	3/4" x 5"	5"	3/4"	1-1/8"	20	60
PFM1411800	PFM1461800	3/4" x 6"	6"	3/4"	1-1/8"	20	60
PFM1411840	PFM1461850	3/4" x 8"	8"	3/4"	1-1/8"	10	40
PFM1411880	-	3/4" x 10"	10"	3/4"	1-1/8"	10	20

\* denotes sizes which are less than the minimum standard anchor length for Strength Design.  
The published size length of the anchor is measured from under the head.

	DeWALT Screw-Bolt+™	Hilti® Kwik HUS-EZ*	Simpson® Titen HD*	ITW Red Head® LDT*
ICC Approval	ESR-3889 Cracked & Uncracked Concrete ESR-4042 Grout Filled CMU	ESR-3027 Galvanized Not ICC Approved	ESR-2713 Galvanized Not ICC Approved	ESR-3699 5/8" & 3/4" Not ICC Approved
Coating	Zinc & Galvanized	Zinc	Zinc & Galvanized	Zinc & EvireXT™
ANSI Bit	Yes	Yes	Yes	Undersized Bit
Diameters	1/4 -3/4"	1/4"-3/4"	1/4"-3/4"	3/8"-3/4"
Matched Tool	DeWALT	Hilti Tools	No	No

\*Hilti and Kwik HUS-EZ are registered trademarks of Hilti Corporation.  
\*Simpson and Titen HD are registered trademarks of Simpson Strong-Tie Company, Inc.  
\*ITW and Redhead are registered trademarks of Illinois Tool Works, Inc.

#### INSTALLATION TOOLS



DCH293  
1-1/8" 20V MAX\*\* SDS Plus Rotary Hammer



DCF887  
1/4" 20V MAX\*\* Impact Wrench



DCF899  
1/2" 20V MAX\*\* High Torque Impact Wrench

#### IMPACT RATED SOCKETS



	ANCHOR DIAMETER	SOCKET SIZE	SOCKET DRIVE
DWMT74479	1/4"	7/16"	3/8"
DWMT75122	3/8"	9/16"	1/2"
DWMT75113	1/2"	3/4"	1/2"
DWMT75104	5/8"	15/16"	1/2"
DWMT75125	3/4"	1-1/8"	1/2"

\*\*Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

Dealer Stamp

# 1-800-4 DeWALT

www.DeWALT.com